



Affordable Price



Wide Range Input Voltage
8-30V



Hi-Brightness Wide Angle
120°



Modbus RTU
Modbus TCP



Customization

Industrial LED Display

Display LED
Industrial



Models Modelos

LI-1664-P10-X

LI-1696-P10-X

LI-16128-P10-X

Technology Tecnologia

High Brightness LED display
Display LED de alto brilho

Color Cor

A - Amber, R - Red, W - White, F - Full Color
Âmbar - Vermelho - Branco - Multicolor

External Dimensions (WxHxD) Dimensões Externas (CxAxL)

694x194x67 mm

1014x194x67 mm

1334x194x67 mm

Resolution Resolução

16x64 LED

16x96 LED

16x128 LED

Pitch (distance between LED's) Pitch (distância entre LED's)

10 mm

Operating Voltage Alimentação

12 to 24 VDC (8-30VDC)

Power Consumption Consumo

Max. 100W - 4.2A@24VDC
(depending on brightness and message type)
(dependendo do brilho e do tipo de mensagem)

Interfaces Interfaces

ModBus RTU | ModBus TCP

Ingress Protection Índice de Proteção

IP54

Reference Construction Composição de Referência

LI-16128-P10 - X

R RED W WHITE A AMBER F FULL COLOR



Technical Details

Ficha Técnica



Affordable Price



Wide Range Input Voltage
8-30V



Hi-Brightness
Wide Angle
120°




Modbus RTU
Modbus TCP




Customization

Display Industrial 16X64 P10

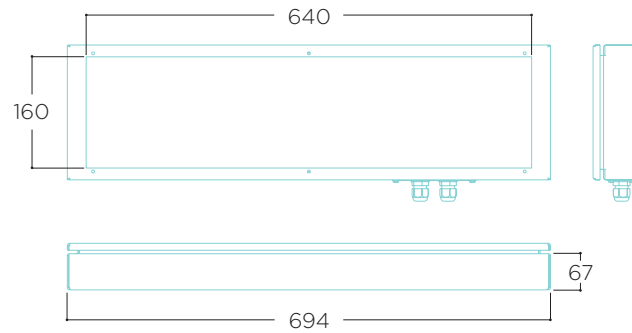

Display Industrial 16X96 P10

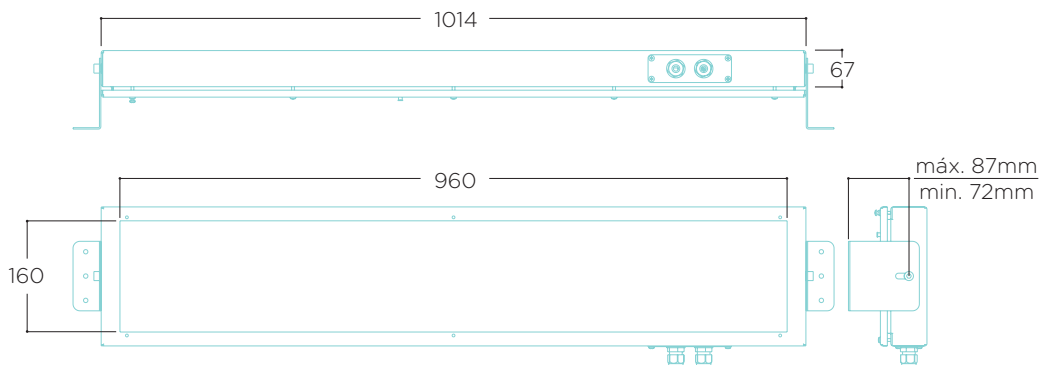

Display Industrial 16X128 P10

