



Affordable Price



Wide Range Input Voltage
8-30V



Hi-Brightness
Wide Angle
120°



USB Pen Message loading
CSV file



Customization

Variable Message Sign 32x160

Painel de Mensagem Variável 32x160



Models

Modelos

LH-32160-P10-XO

Technology

Tecnologia

High Brightness LED display
Display LED de alto brilho

Color

Cor

A - Amber, R - Red*
Âmbar - Vermelho

External Dimensions (WxHxD)

Dimensões Externas (CxAxL)

1604x323x80 mm

Resolution

Resolução

32x160 LED

Pitch (distance between LED)

Pitch (distância entre LED)

10 mm

Operating Voltage

Alimentação

12 to 24 VDC (8-30V)

Power Consumption

Consumo

Máx. 192W - 8A@24VDC
(depending on brightness and message type)
(dependendo do brilho e do tipo de mensagem)

Ingress Protection

Índice de Proteção

IP54

Interfaces

Interfaces

Message loading: USB
External console: RS-485

Software

Software

DigiLED Studio (free of charge)
(grátis)

Data Loading

Carregamento de Dados

CSV file format (MS Excel)
USB PEN Disk

* Others colors are available under consult.
** Outras cores estão disponíveis sob consulta.*



Technical Details

Ficha Técnica



Affordable Price



Wide Range Input Voltage
8-30V



Hi-Brightness Wide Angle
120°





USB Pen Message loading
CSV file



Customization

Technical Drawing (Dimensions - mm)
Desenho Técnico (Dimensões - mm)

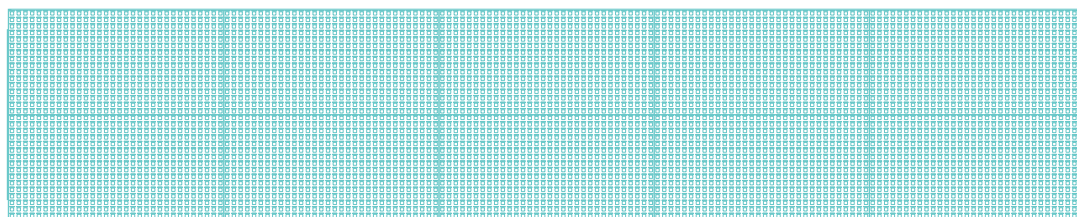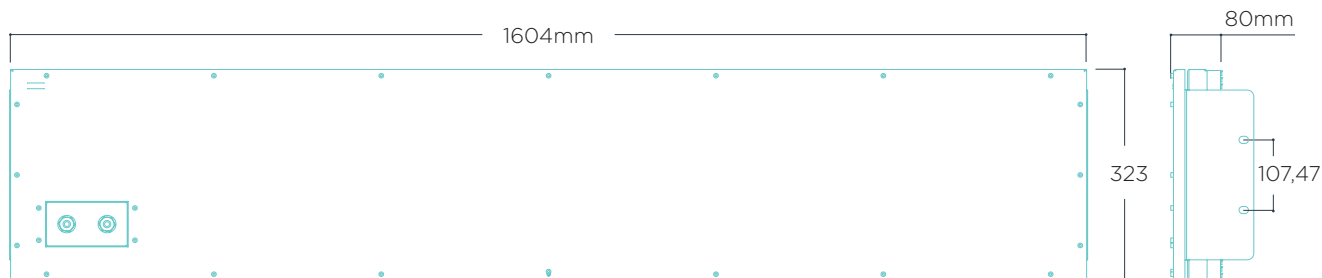

External Console
Consola Externa

Dimensions: 150x78x19 mm
Dimensões

LH-CTT480272



Touch Screen
Ecrã Tátil

User-friendly multi-language menus
Menus intuitivos em vários idiomas

Message loading via USB
Carragamento das mensagem por USB

